



## E-Series RF 1:4 Flux Coupled Step-up Transformer 2.0 - 800 MHz

### Features


- Surface Mount
- 1:4 Impedance Ratio
- CT on Secondary
- Available on Tape & Reel




### Description

M/A-COM's ETC4-1-2 is a 1:4 RF flux coupled step-up transformer in a low cost, surface mount package. Ideally suited for high volume cellular and wireless applications. Typical applications include single to balanced mode conversion and impedance matching.

### SM-22 Package

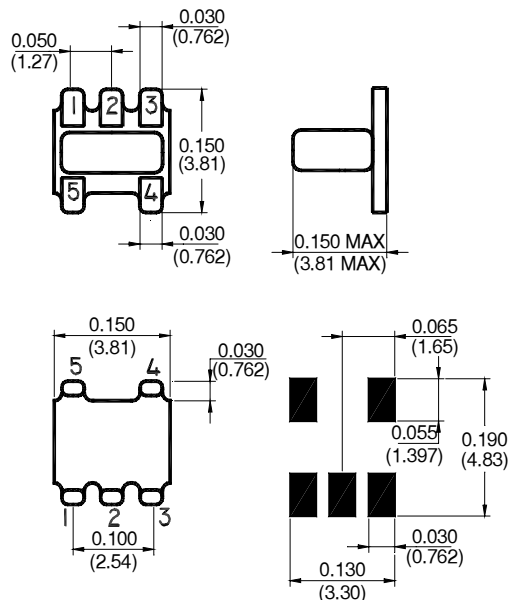

### Schematic

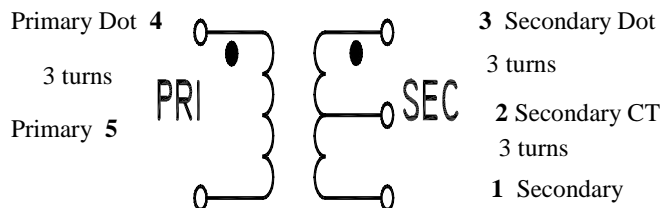

### Electrical Specifications @25°C

Parameter	Units	Nominal	Maximum	Mean (x)	Sigma ( $\sigma$ )
Frequency Range 2.0 - 800	MHz	—	—	—	—
Insertion Loss ( $f_L - f_U$ )					
10 - 100 MHz	dB	—	1.0	—	—
5.0 - 600 MHz	dB	—	2.0	1.21	0.032
2.0 - 800 MHz	dB	—	3.0	—	—
Amplitude Unbalance					
10 - 100 MHz	dB	—	0.25	—	—
2.0 - 800 MHz	dB	—	1.0	—	—
Phase Unbalance					
10 - 500 MHz	Degrees	—	2.0	—	—
2.0 - 800 MHz	Degrees	—	10	—	—

Note: Mean and Sigma calculated from average loss at @ 105 MHz.

Please Note that the photograph above indicates typical package only, not actual unit.

V2.00 S 0258 M

## Absolute Maximum Ratings


Parameter	Absolute Maximum
RF Power	250 mW
DC Current	30 mA
Operating Temperature	-40°C to +85°C
Storage Temperature	-40°C to +85°C

## Functional Configuration


Function	Pin No.
Secondary	1
Secondary CT	2
Secondary Dot	3
Primary Dot	4
Primary	5

## Typical Performance Over Extended Bandwidth (30kHz - 1.0GHz)


### Insertion Loss

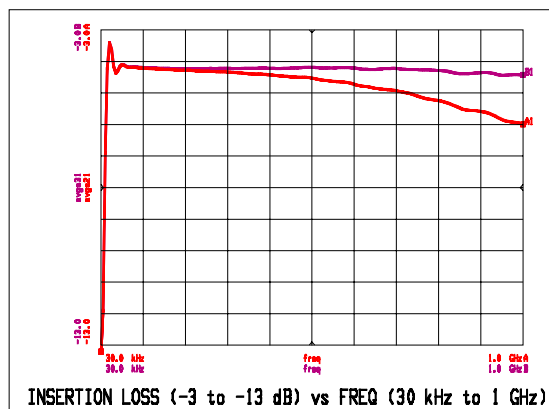


### Phase Unbalance

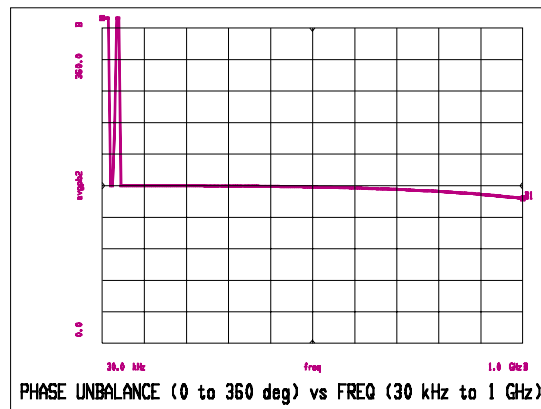

### Amplitude Unbalance

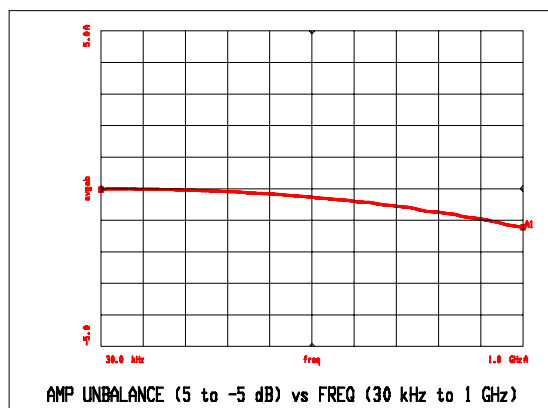

### Input Impedance

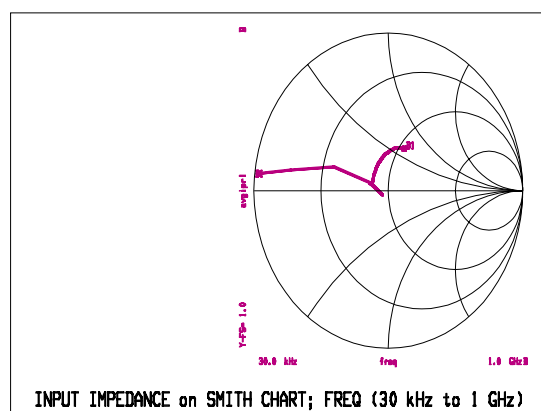

Note: All measurements performed on Hewlett Packard 8753D Network Analyzer (201 sample points, linear scale) in a 50 ohm coplanar waveguide environment. Tables created using MDS software.