



THORDARSON-MEISSNER

SEVENTH AND BELLMONT
MT. CARMEL, ILLINOIS


THORDARSON TR-67

TRANSISTOR OUTPUT TRANSFORMER
for High Fidelity Applications
1.5 Watts

Primary.....125 Ohms CT @ 50 MADC (unbalanced)
Brown-Red (CT) -Blue

Secondary.....8 Ohm Voice Coil.....Black-Green
Primary DC Resistance..... 5 Ohms
Secondary DC Resistance..... .7 Ohms

Frequency Response.....Plus or Minus 1/2 DB from 20-20000 Cycles

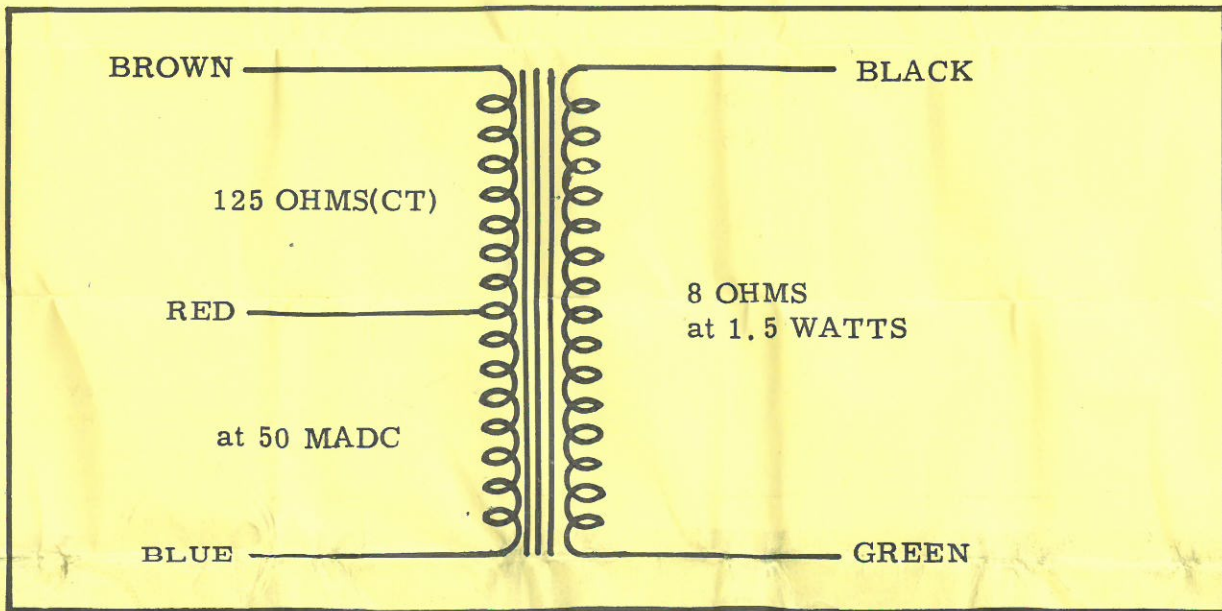

SD-TR-67

