

THORDARSON-MEISSNER

SEVENTH AND BELLMONT
MT. CARMEL, ILLINOIS

THORDARSON 23V65

SELENIUM RECTIFIER TRANSFORMER

Primary.....117 Volts, 50/60 Cycles.....For Connections
See Chart


Secondary.....25.0 Volt to 53.5 Volts A.C.

Secondary Connections.....For full wave Bridge connections connect
lugs 9 to 10.

FULL WAVE BRIDGE OUTPUT 8.0 A.D.C.

Part No.	Resistive Load		Capacitive Load		Input 117 vac Term No.	Connect Term No.
	Secondary Volts A.C.	Output Volts D.C.	Secondary Volts A.C.	Output Volts D.C.		
2	53.5	44.0	53.0	63.0	1-2	—
	50.0	40.5	50.0	59.0	1-7	2-6
3	45.3	37.0	45.0	52.0	1-6	2-5
	42.5	34.5	42.0	48.0	1-7	2-5
V	37.5	30.5	37.5	40.0	1-3	—
	35.5	27.5	35.5	39.0	1-7	3-6
6	32.5	25.0	33.0	35.5	1-6	3-5
	31.5	24.0	31.5	31.5	1-7	3-5
5	29.0	21.5	29.0	29.5	1-4	—
	27.5	20.5	27.5	28.0	1-7	4-6
	26.0	19.5	26.0	26.0	1-6	4-5
	25.0	18.0	25.0	25.0	1-7	4-5

MTG Type LHV
Overall
Dimensions
H—5 3/8
W—4 3/8
D—7 1/2
Weight—26 lbs.

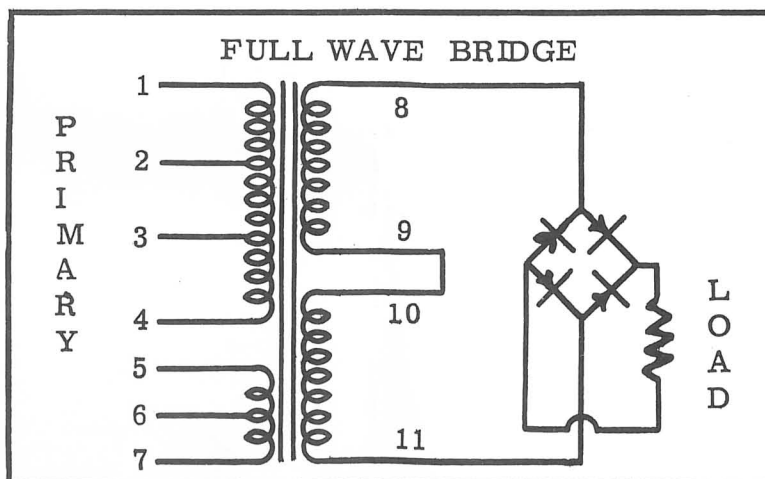

SD-23V65

LEADERS IN COILS AND



TRANSFORMERS SINCE 1895

Printed in USA