


# WIRE INFORMATION

## 1. CORD GRIP RANGE

ACCEPTS CONDUCTOR/CORD SIZES  
18/3 TYPE SJ TO 12/3 TYPE S  
(.296 - .687 DIA.)  
WIRE WITH ROUND CORD ONLY


TIGHTEN CORD CLAMP SCREWS (ALTERNATELY)  
8 to 10 IN.-LBS.

2. SELECT THE PROPER WIRE SIZE AND TYPE FOR LOAD AND APPLICATION. REFER TO N.E.C. TABLES, ARTICLE 400.

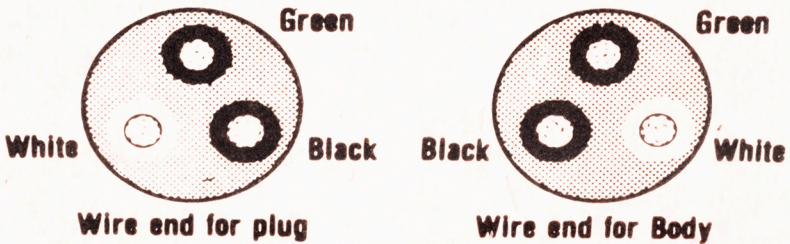

3. BEFORE WIRING SELECT THE PROPER END OF THE CORD.

4. USE STRIP GAUGE EMBOSSED ON WIRING CHAMBER OR ACTUAL SIZE TEMPLATE BELOW.

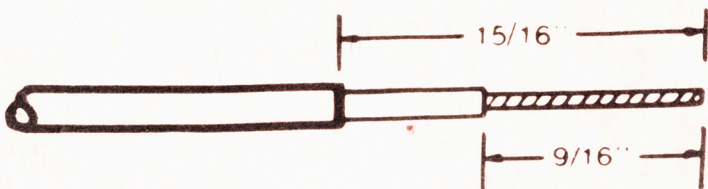

5. DO NOT TIN CONDUCTORS.

6. LOOSEN ALL TERMINAL CLAMP SCREWS, INSERT ALL CONDUCTORS INTO PROPER WIRE ENTRANCE HOLES. TIGHTEN SCREWS, SECURELY, 9-12" LBS.

7. CONNECT GREEN WIRE TO TERMINAL WITH GREEN HEX HEAD SCREW. CONNECT WHITE WIRE TO WHITE (SILVER) TERMINAL SCREW.