



NOTES:

1. MAX. MTG. TORQUE = 3lb-in.
2. HARDWARE IS INCLUDED.

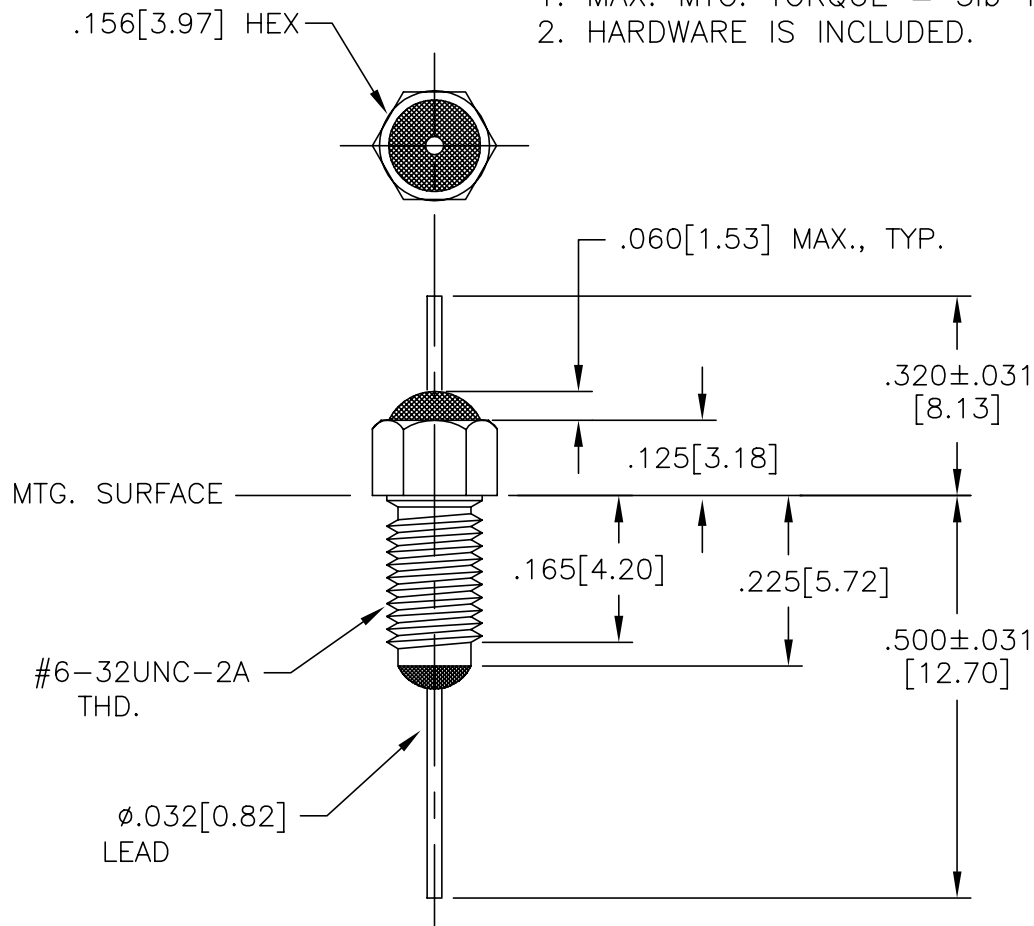

LEAD FINISH:	SILVER
BUSHING FINISH:	SILVER
CAPACITANCE	.1uF +100/-0%
TEMP. RANGE	-55°C TO 125°C
CURRENT	10 AMP MAX.
WORKING VOLTAGE	85°C -- VDC MAX. 125°C 50 VDC MAX.
D.C. RESISTANCE	.01ohms MAX.
MIN. I.L. PER MIL-STD-220 AT 25°C NO LOAD	

FREQ. MHZ	I.L. (db)
1	20
10	40
30	50
100	60
300	70
1 GHz	70

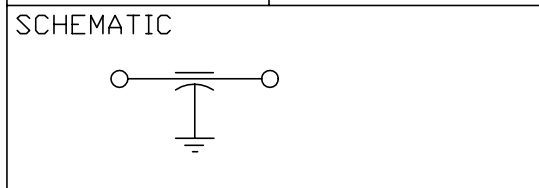

MARKING:

PART: S779019

BAG:  
54-779-019  
DATE CODE  
QTY/BAG (200 MAX.)

CN. 184938	35	REV. NO.	TOLERANCES UNLESS OTHERWISE SPECIFIED	 SPECTRUM CONTROL INC. ERIE, FAIRVIEW PENNSYLVANIA		
	CHANGE NOTICE	Fractions ± 1/64			Dwn. KAUFFMAN	Description FEED THRU RESIN SEAL FILTER
		Dec. .xx±			Ckd. 11-6-98	
		Dec. .xxx±.005			Apvd.	54-779-019
		Angles ±0° 30'			Scale NONE	
CODE IDENT. NO. QLSP2						