




Specification for:  
**YF-40601-TC**

111 Zeta Drive  
Pittsburgh, PA 15238  
Phone: 412/696-1333  
Fax: 412/696-0333  
Email:magnetics@spang.com

**DIMENSIONS**

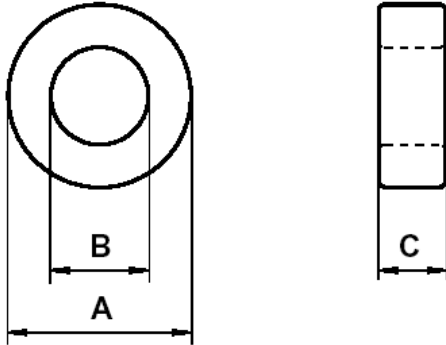

(mm)	Uncoated Nominal:	Coated Min:	Coated Max:
O.D. (A)	5.84	5.48	6.20
I.D. (B)	3.05	2.69	3.41
Ht. (C)	1.52	1.26	1.78

Eff. Parameters		
A <sub>e</sub> mm <sup>2</sup>	l <sub>e</sub> mm	V <sub>e</sub> mm <sup>3</sup>
2.0	13	26.7

**INDUCTANCE**

AL value (nH/T <sup>2</sup> )	Test conditions
585 ± 20%	10kHz, 0.5 mT (For N=5, use 0.2 mA), 25°C

**CORE LOSSES**

P <sub>L</sub> max	Production lot limit Max avg	Test conditions
5.9 mW (220 mW/cm <sup>3</sup> )	5.3 mW (200 mW/cm <sup>3</sup> )	25 kHz, 200 mT, 100°C
-	-	-

**COATING**

Parylene rated for 130°C continuous operation.  
Voltage breakdown rating 1000V Min Wire-to-Wire.

**NOTE**

Spec. Modifications	Previous	Revised
2005.06.09	Losses: General F material	Losses: Detail as indicated