




REVISIONS				
LTR	ECO	DESCRIPTION	DATE	APRVD
A	20010200	DRAWING INITIATED	03/22/01	
B	20010255	LABEL CHANGE ON OD	04/26/01	APD

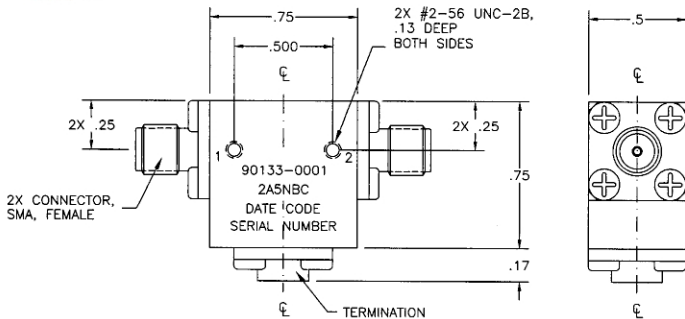

ELECTRICAL CHARACTERISTICS:

FREQUENCY RANGE	3.3 - 3.7 GHz
ISOLATION (Min)	15 dB
INSERTION LOSS	0.3 dB (TYP) ; 0.4 dB (MAX)
VSWR (Max)	1.35 : 1
TERMINATION	2 Watts
FORWARD POWER (CW)	5 Watts
TEMPERATURE RANGE	-35°C TO +85°C

USED ON	UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES	DRAWN	A SRIVASTAVA	DATE	03/22/01	RENAISSANCE ELECTRONICS CORPORATION 12 LANCASTER COUNTY RD HARVARD, MA 01451 PHONE : (978) 772-7774 FAX: (978) 772-7775
	TOLERANCES ON	CHECKED				
	DECIMALS	ANGLES	ENG. APVD	A SRIVASTAVA	DATE	TITLE
	.X± .03		MFG. APVD			ISOLATOR, COAXIAL
	.XX± .02	±1/2'				
	.XXX± .01					
SPECIFICATION #	UNLESS OTHERWISE SPECIFIED ALL OVER	APPROVALS		SIZE	CAGE IDENT NO	DRAWING NO.
	NOTE: THIS DWG INCORPORATES THIRD ANGLE PROJECTION			A	ORJ02	2A5NBC
FILE NAME				SCALE		DISK # F
2A5NBC						SHEET 1 OF 1