



*Representative photograph, actual product appearance may vary.*

*Due to regional agency approval requirements, some products may not be available in your area. Please contact your regional Honeywell office regarding your product of choice.*

## **MM500PG1QA**

**MM Series Stainless Steel Pressure Sensor, Unamplified Output, Gage, 0 psi to 500 psi, Item Number 9302906**

### **Features**

- Low cost
- Wide choice of pressure ranges available
- Rugged, compact configuration
- PC mountable
- Threaded port
- For use by the OEM
- Easy to package
- Mounting flexibility
- No adapter required

### **Typical Applications**

- HVAC
- Gas chromatography
- Paint-spraying systems
- Electronic pressure switches
- Medical diagnostics
- Heat pumps
- Hydraulic controls
- Irrigation systems
- Automotive

### **Description**

The Mediamate pressure transducer provides you with the corrosion resistance of stainless steel at low OEM pricing. It is fully compensated and completely interchangeable without further calibration.

The Mediamate's wetted parts and outer case are made from 300 series stainless steel. It is now being used with a wide variety of corrosive media such as Freon, ammonia, water, and hydraulic fluids. Its rugged construction and proven reliability make it truly cost effective.

## MM500PG1QA

MM Series Stainless Steel Pressure Sensor, Unamplified Output, Gage, 0 psi to 500 psi, Item Number 9302906


Product Specifications	
Measurement Type	Gage
Signal Conditioning	Unamplified
Pressure Range	0 psi to 500 psi
Supply Voltage	5.0 Vdc, 6.0 Vdc max.
Maximum Overpressure	750 psi
Burst Pressure	2,500 psi
Port Style	1/8-27 NPT
Temperature Compensation	Yes
Output Type	0 mV to 50 mV
Accuracy	0.25% full scale BFSL
Response Time	less than 0.2 ms
Input Impedance	500 ohms
Output Impedance	900 ohms
Insulation Resistance	1000 Mohms @ 50 Vdc max.
Output Calibration	Yes
Termination Type	Hollingsworth Connector
Weight	< 85 g [ $< 3.0$ oz]
Full Scale Span	50 mV
Operating Temperature Range	-40 °C to 100 °C [-40 °F to 212 °F]
Compensated Temperature Range	-1 °C to 82 °C [30 °F to 180 °F]
Media Compatibility	Limited only to those media which will not attack a brazed assembly of 300 Series stainless steel parts
Approvals	CE
UNSPSC Code	411121
UNSPSC Commodity	411121 Transducers
Availability	Global
Series Name	MM Series

## MM500PG1QA

MM Series Stainless Steel Pressure Sensor, Unamplified Output, Gage, 0 psi to 500 psi, Item Number 9302906

### DIMENSIONS

xx.xx = inches  
(xx.x) = mm

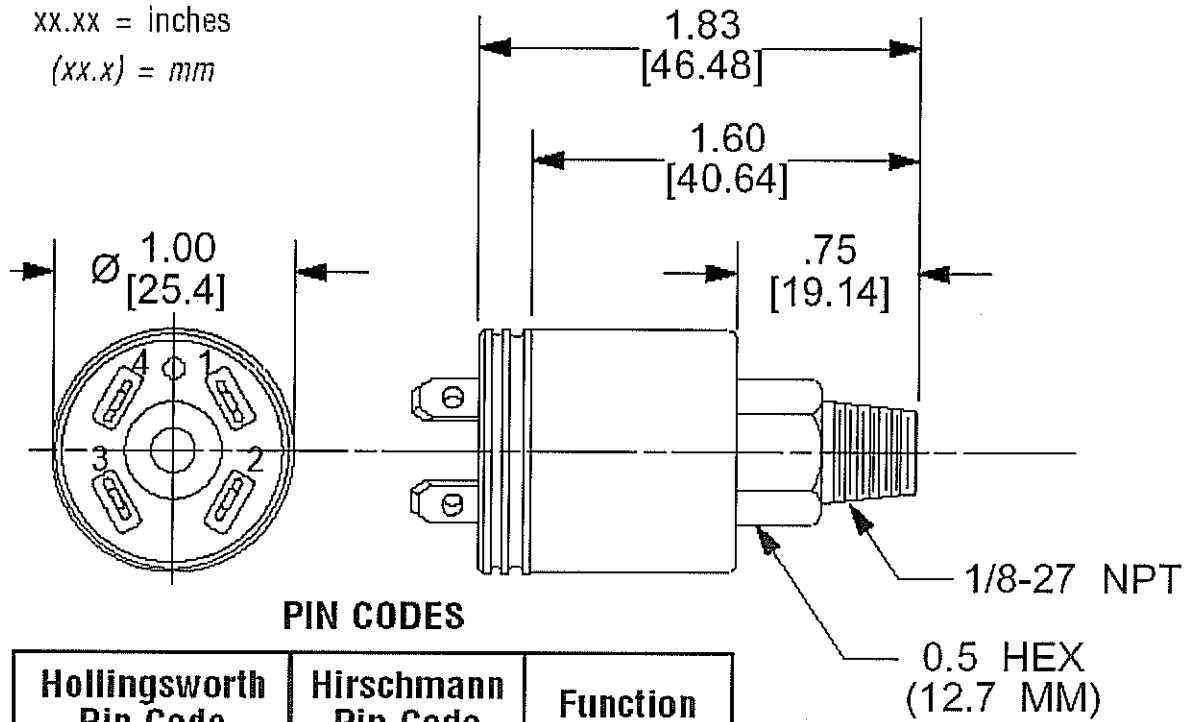

### PIN CODES

Hollingsworth Pin Code	Hirschmann Pin Code	Function
1	1	+ Signal
2	2	- Excitation
3	3	- Signal
4	4	+ Excitation

Pin codes are for optional Hirschmann and Hollingsworth connectors