


SNAP ACTION SWITCHES

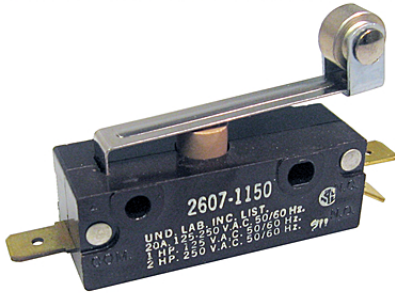

2600, 2700 Series Snap Action Switches

Fewer parts and minimum spring flexing increase the life of McGill snap action switches. 2600 and 2700 Series switches offer precision and low price. A variety of actuators, circuits, and terminal forms are available to meet your specific requirements; 1/4" quick-connect terminals standard. All switches are UL Recognized components and CSA Certified.

Specifications

■ 2600 Series Single Pole

20A, 125-250V AC;
1 HP, 125V AC;
2 HP, 250V AC
50/60 Hz
Suitable for 20A,
12V DC applications
105°C ambient


2600, 2700 Series Snap Action Switches

	2600 Series			2700 Series		
	Operating Force (Max.)	Poles	Cat. No	Operating Force (Max.)	Poles	Cat. No
Basic plunger actuator	20 oz.	SPDT	2601-1150	35 oz.	DPDT	2701-1150
Large (red) push-button	16 oz.	SPDT	2602-1150	—	—	—
Rigid lever actuator	4 oz.	SPDT	2603-1150	7 oz.	DPDT	2703-1150
Rigid lever w/steel roller	4 oz.	SPDT	2604-1150	8 oz.	DPDT	2704-1150
Flexible lever	8 oz.	SPDT	2606-1150	14 oz.	DPDT	2706-1150
Flexible lever w/steel roller	9 oz.	SPDT	2607-1150	16 oz.	DPDT	2707-1150
Steel overtravel plunger	20 oz.	SPDT	2609-1150	35 oz.	DPDT	2709-1150
Large (black) pushbutton	16 oz.	SPDT	2610-1150	—	—	—

Dimensions

Switch Series	Case	Mounting Holes
2600 Series	1 ¹³ / ₁₆ " X 4 ¹ / ₆₄ " X 4 ¹ / ₆₄ "	one 0.145" diameter; one 0.145" x 0.175" slotted; on 1.000" center
2700 Series	1 ¹³ / ₁₆ " X 1 ²¹ / ₆₄ " X 4 ³ / ₆₄ "	one 0.145" diameter; one 0.145" x 0.175" slotted; on 1.000" center

DIMENSIONS inches



2607