


MALLORY**RSA1213****STEREO SPEAKER SWITCH**

The RSA1213 is designed to allow the installation of a pair of remote speakers in a stereo sound system. The selection of the remote speakers is up to the individual's taste. However, if ordinary appliance wire is used, do not exceed 50 feet in distance. The switch is normally mounted at the central control panel. Select a location which allows ample space for the switch and wiring.


INSTALLATION

1. Drill a 13/32" hole in the panel. Maximum panel thickness is 1/4".
2. Refer to drawings. Notice that the positive (+) speaker leads from the amplifier(s) are connected to the "A" switch terminals.
3. Connect the + leads from the main speakers to the "M" switch terminals.
4. Connect the + leads from the remote speakers to the "R" switch terminals.
5. Be sure ground (-) leads from all four speakers are properly connected to the ground (-) terminals on the amplifier(s).
6. Mount switch in control panel and tighten nut securely. Install 366-1 knob.

SEE DRAWINGS ON OTHER SIDE

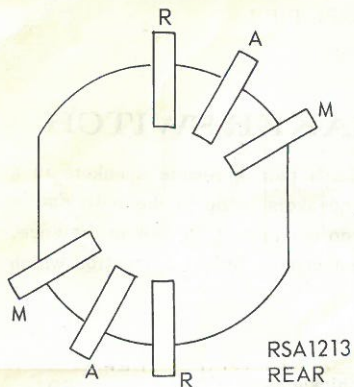

BOTH
MAIN ○ REMOTE



366-1 KNOB

AMPLIFIER(S)
RIGHT LEFT

