


A. SCHEMATIC:

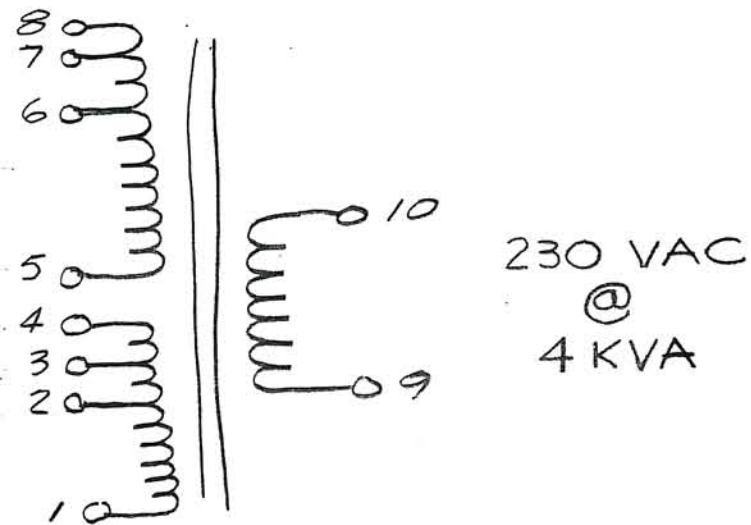

B. INPUT/OUTPUT REQUIREMENTS:

PRIMARY: 1 $\phi$ , 47/63 HZ  
190, 208, 220, 380, 416, 460

PRIMARY	JUMPER	LINES TO
190V	1-5, 2-6	1 & 6
208V	1-5, 3-7	1 & 7
220V	1-5, 4-8	1 & 8
380V	2-5	1 & 6
416V	3-5	1 & 7
440V	4-5	1 & 8


C. MECHANICAL CONFIGURATION:

1. OPEN FRAME CONSTRUCTION WITH MOUNTING FEET.
2. VACUUM IMPREGNATED
3. SCREW TERMINATIONS.
4. TEMPERATURE: -30°C TO 50°C AMBIENT.
5. HUMIDITY: TO 95%
6. ALTITUDE: TO 13,500 FEET.
7. VIBRATION & SHOCK: NORMAL SHIPPING - FIXED STATION USE.

BASLER No. REF  
BE13186001

REV	DESCRIPTION	DATE	APVD
A	REV PER DCN # 1405	11-15-74	JEI.

STAMP  
VENDOR'S NAME,  
PART No. & S.R.S.  
PART No. & DATE OF  
MANUFACTURE

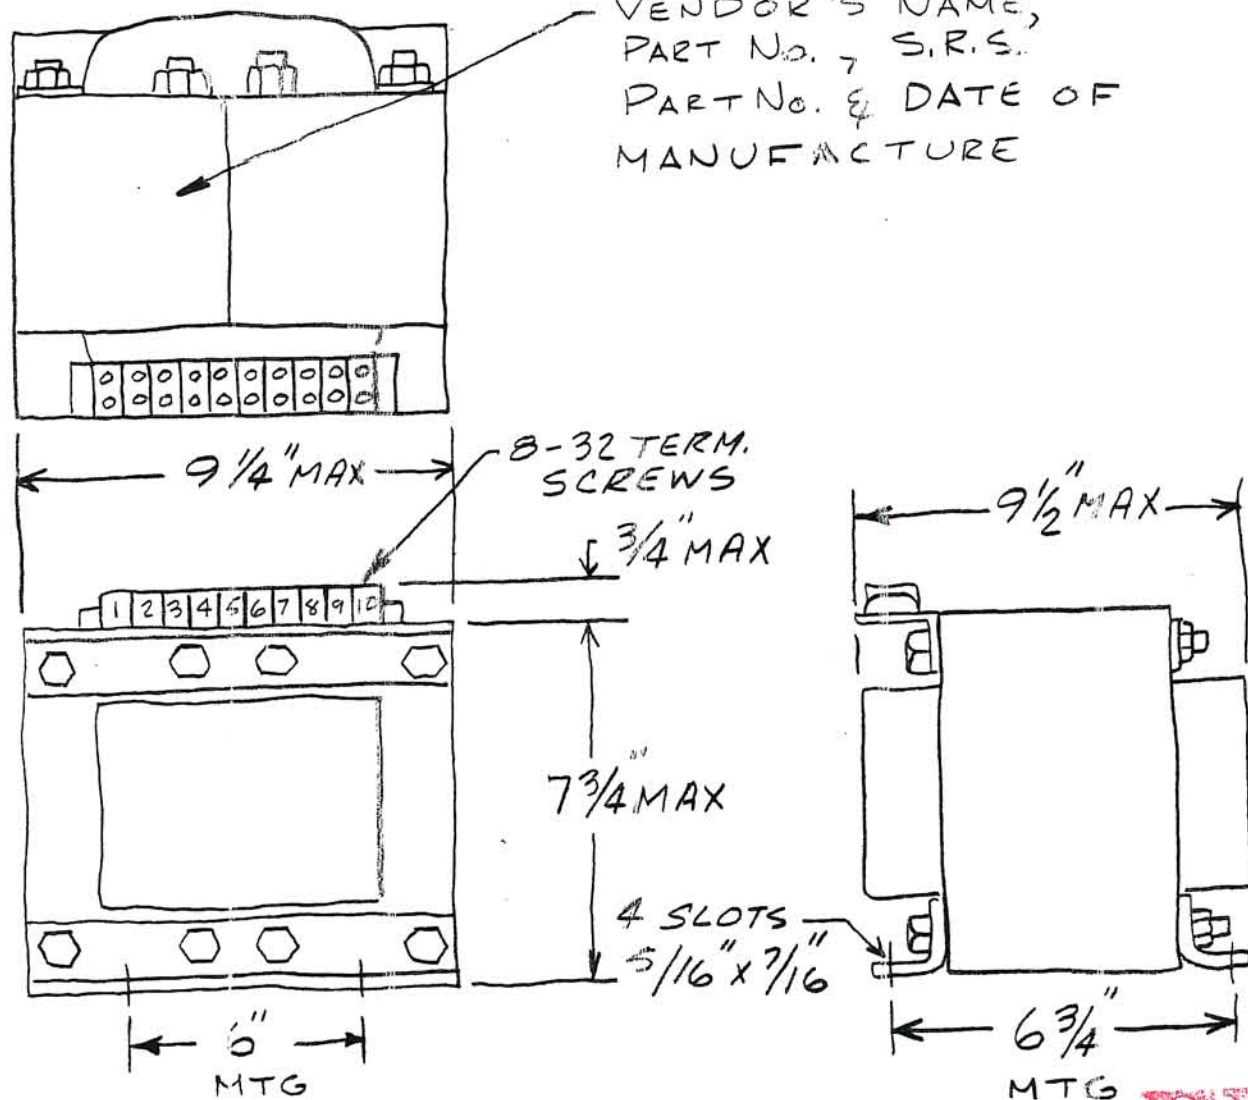

ENG. COPY

JUL 18 1983

SIMILAR TO  
110950

EJE 11 April 73		SCIENTIFIC RADIO SYSTEMS INC	
EJE 11 April 73		NEW YORK	
RICK 3/26/74		TITLE TRANSFORMER, ISOLATION	
3/27 3/27/74		SIZE B	
APPROVED		151805	
APPROVED		SCALE NONE	
		SHEET	