

intercommunication



and sound equipment

MARK SIMPSON MANUFACTURING CO., INC. • 32-28 49TH STREET, LONG ISLAND CITY 3, N.Y. • YE. 2-3400

MASCO

ADD-A-UNIT PHONO ATTACHMENT

MODEL MP-3


1. Voltage - 117 volts - 60 cycle - A. C. only.

Use of the MP-3 phono top on other than the specified voltage or frequency will result in improper operation and serious damage which will void the guarantee.

2. Pickup - High impedance crystal type 1.0 volt output.
3. The MP-3 phono top is designed to fit the covers of the following Masco amplifiers:

Audiosphere 18
Audiosphere 27
Audiosphere M-27
Audiosphere 36
Audiosphere 60
Audiosphere 100

4. When unpacking the MP-3 phono top, be careful not to discard the paper bag containing two (2) #6 sheet metal screws and two (2) strips of rubber channel, 10-1/8" long. The two screws and rubber channels are used to mount the MP-3 phono top to covers of the amplifiers listed in paragraph #3.
5. To mount the MP-3 phono top, fit a piece of rubber channel on each side of the unit. On the front of the unit is a 1/4" lip which fits onto the overhang on the covers of the amplifiers. Slide the MP-3 as far back as possible. When this is done, the two holes on the unit match the two holes on all of the above mentioned amplifier covers. Tighten phono top down with the two (2) #6 screws supplied in the paper bag. Plug the pickup arm lead (shielded wire) into the socket at the rear of the amplifier marked "Phono-Radio". Plug the line cord into the A. C. receptacle, which is also located at the rear of the amplifier. The unit is now ready for operation.
6. Select the proper speed and needle to play records.

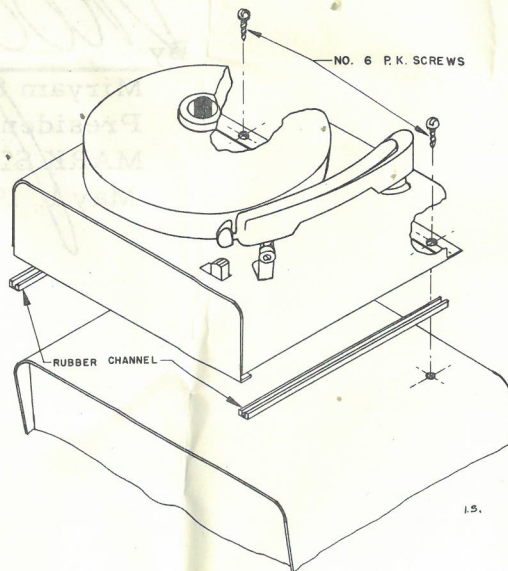

intercommunication



and sound equipment

MARK SIMPSON MANUFACTURING CO., INC. • 32-28 49TH STREET, LONG ISLAND CITY 3, N.Y. • YE. 2-3400


WARRANTY

Mark Simpson Mfg. Co., Inc. ("MASCO") warrants to the purchaser of this instrument that it will repair or replace any part thereof which proves upon inspection by Masco to have been defective within six months from the date of original sale by Masco, if it was used thereafter solely within the United States of America. This warranty shall not apply to any part of this instrument if it has been installed, altered, repaired or used in a way that in the opinion of Masco affects the reliability or detracts from the performance of any part of the instrument, or if its serial number or the serial number of any such part has been altered, defaced or removed, or if the defect is not brought to the attention of the Masco distributor from whom this instrument was purchased within the warranty period.

The obligation of Masco hereunder is limited to the repair of a defective part, or making a replacement part available to the purchaser, and does not include the furnishing of any labor involved or connected therewith, such as that required to diagnose trouble, or to remove or install any such parts, nor does it include responsibility for any transportation expenses in connection therewith.

The foregoing is in lieu of all other warranties express, implied or statutory, and Masco neither assumes, nor authorizes any person to assume for it, any other obligation or liability in connection with the sale of this instrument.

By

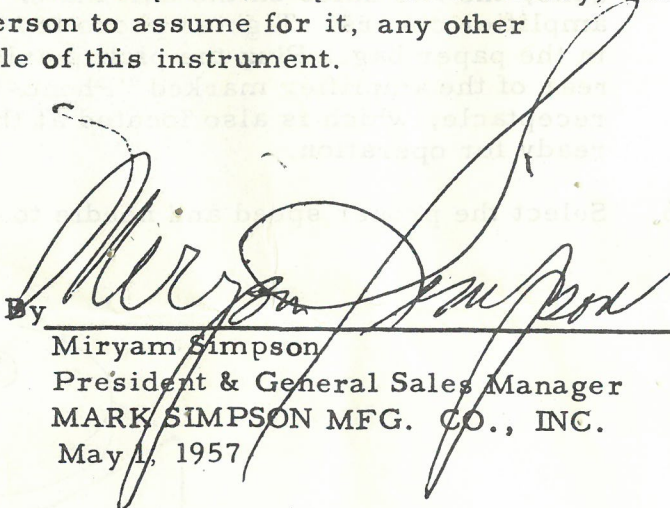

Miryam Simpson
President & General Sales Manager
MARK SIMPSON MFG. CO., INC.
May 1, 1957