


Duty Cycle:		Continuous 100% On-Time	Intermittent 25% (100 Seconds Max)	UL Recognition		
Power Consumption:		7.8 Watts 20 Watts		Recognized under		
Current Draw:	12VDC	0.632 Amp		the Component		
	24VDC	0.315 Amp	0.82 Amps	Recognition Program		
Holding Force:	12VDC	150 ounces	168 ounces	of Underwriters		
	24VDC	150 ounces	168 ounces	Laboratories Inc.		
Resistance:	12VDC	19.0 Ohms	7.78 Ohms			
	24VDC	76.3 Ohms	29.3 Ohms	<i>8</i> 1		

Pull Force in ounces											
Stroke, in inches:	0.050"	0.125"	0.250"	0.375"	0.500"	0.625"	0.750"	1.000"			
Continuous Duty:	70	35	14	8	5	3	2	1			
Intermittent Duty:	110	73	35	22	18	10	7	 5			

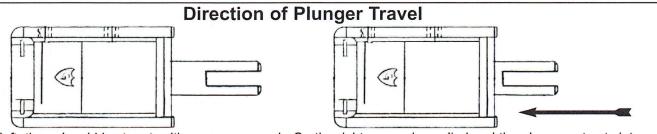

On the left, the solenoid is at rest, with power removed. On the right, power is applied and the plunger retracts into the body of the solenoid in the direction of the arrow. Optional spring kits return plunger to the "rest" position.

Guardian part numbers look like this:

11HD - I - 12VDC

The first number is the model number, the middle letter defines Intermittent or Continuous Duty cycle, and the third number is the power supply to the solenoid.

